



EcoPrint 54/56 RH

Why EcoPrint 54/56?

the EcoPrint 50 Series-VIL (Variable Information Labeler) is one of the most versatile and price competitive printer – applicators on the market today that offers:




- variable speed printing up to 300 mm/sec
- label sizes up to 60 mm
- reliable and easy to use.
- Available in RH and LH versions
- Range of applicator options i.e. tamps, blow box etc
- Menu driven for operation through front panel touch pad
- 'Flat edge' print head for complete use of print area
- Thermo-and thermo direct printing methods
- Print resolutions: 8 dots/mm (EP56), 12 dots/mm (EP54)

The new Variable Information Labeler has been designed with the following market sectors in mind:


- Labeling of primary food packaging
- Labeling of primary pharmaceutical packaging
- Labeling of cosmetics packaging, DIY and automotive
- Labeling of secondary food packaging and other products

Note: For larger label sizes, please ask for our EcoPrint 100 Series

We give your
Product
Identity

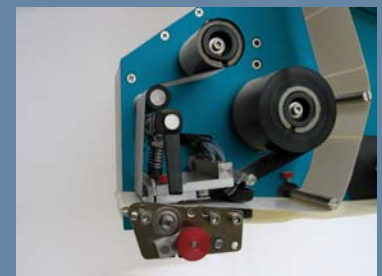

EcoPrint 54/56 printer

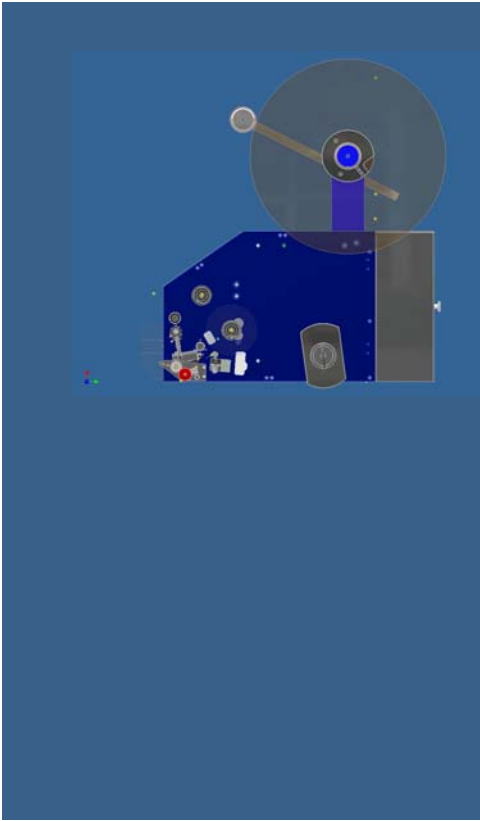

Technical Specifications



Label width up to 60 mm,
 Recommended minimal. Label width : 30mm, length: min 10 mm
 Labeling accuracy: +/- 1 mm
 Label length: up to 100 mm
 Label reel diameter: 300 mm
 Core diameter : 40 mm
 Print mode Intermittent, last label out
 Printing method Thermodirect/Thermotransfer
 Max. print width: 56 mm (EP56), 54 mm (EP54)
 Print rate: up to 250 prints/min.
 Print resolution: 203 dpi (EP56/8dots) or 300 dpi (EP54/12 dots)
 Transfer ribbon Length: 300 m, various widths
 Fonts: Helvetica Bold, Helvetica Roman, Swiss light,
 Baskerville, Brush Script, Monospace
 Barcodes: 1D-Barcodes, 2D-Barcodes und Composite Codes
 Connections: Serial RS0232, Centronics, USB 1.1, Flash Smart-Card, Ethernet 10/100
 Base-T (Option)
 Drive: Stepper
 Control: Digital
 Voltage: 115/230 V, 50/60 Hz, 100 VA
 IP-Protection IP 44
 Controller Dimensions: 205x485x325mm, weight: 8 kg
 Temperature: 5-35 C, Humidity: max 80%
 Approval CE Software Windows design and print software: Labelstar PLUS



Applicator Options:

The following PLC controlled applicator options are available: Blow-, touch- tamp-swing arm tamp all with smart tamp/blow options, together with a variety of stands and product sensors.

Note: Please call, if you need a labeling solution; applicators or printer –applicators, customized to meet your requirements. Our system specialists have years of experience in the development and integration of labeling and printing systems for most industrial applications

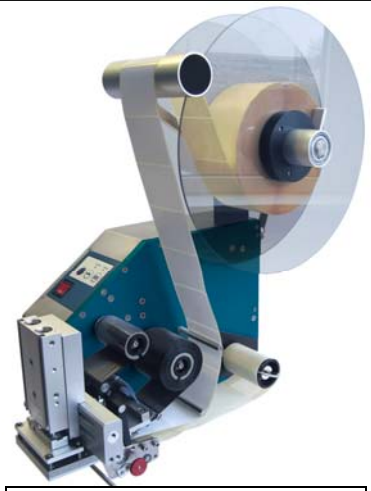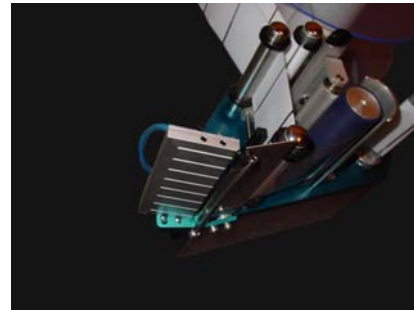

EP 56/8 LH with tamp