



EcoPrint125 RH with BlowBox Option

Why EcoPrint 100, 125 and 200?

EcoPrint 100, 125 and 200 the most versatile, wider web, PLC driven LPA on the market. This modular LPA system offers:

- Comprehensive range of standard applicators, satisfying all industrial requirements.
- Robust, heavy duty chassis, designed for industrial environments.
- Chassis that can house a wide range of Thermal Transfer Printers to fulfil any print specification and requirement.
- Capable of accurate label application onto – front, side, top, bottom, curved surfaces and around corners.
- Label widths up to: 104 (EP 100), 130mm (EP 125) and 168mm (EP200).
- PLC control for maximum flexibility and simple system integration.
- Plug and play modules for maximum uptime labelling



We give your
Product
Identity



Technical Specifications

Standard Features

- Left or Right Hand Version
- Suitable for all common OEM Print Engines eg Valentin, Sato, Zebra, Datamax, CAB etc.
- Label stock range from 104 mm to A5
- Available Blow Box sizes up to 180x230cm
- Available Tamp stroke lengths up to 800mm
- All models PLC controlled with spare I/O available
- Easy Integration into system applications
- User interchangeable modules for maximum uptime labeling
- Label placement accuracy +/- 1 mm
- Label roll size 300mm outside diameter with 76mm inside diameter label roll core
- Thermal or Thermal Transfer printing modes

Label type

- Die cut waste removed on 76 mm core, outside wound. Gap between labels 3 mm.

PLC controlled operating features

- Manual print (JOG) and reprint
- Timing control (product delay, dwell time etc)
- User definable functions (eg product count)
- On screen warning messages
- Password protection
- Spare I/O ports for full system integration
- Full range of 'plug & play' accessories

Electrical requirements

- 115/220/240 Vac, 50/60Hz single phase, up to 300w max.


Compressed Air Requirements

- Clean dry air at 5-6 Bar
- Air consumption: 5 – 120 ltrs/min, depending On Application mode and Application rate

Authorized Dealer:

EcoPrint 100, 125 and 200 Label Printer Applicators

Outer Dimensions

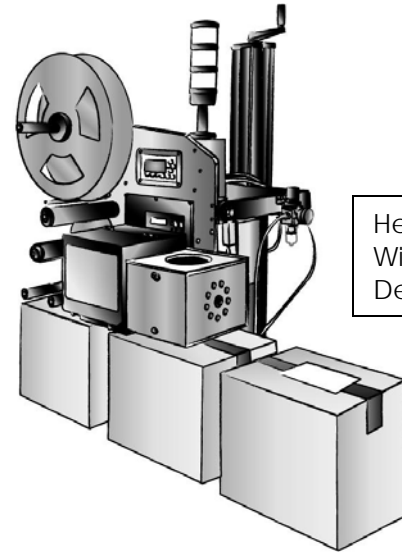

Height: 660mm
Width: 540mm,
Depth: 500mm

Approval



Application Modes

	Label Width Min.	Label Width max.	Label Length min.	Label Length max.	Stroke Length all in mm.
Blow	25	130	25	130	
Blow	25	130	25	230	
Blow	25	180	25	180	
Blow	25	180	25	230	
Tamp	20				50
Tamp	20				160
Tamp	20				300
Tamp	20				500
Tamp	20				800

Options

- Label Creation Software
- Support Stands
- Alarm Beacon 3 colors version
- Low Label Alarm
- Smart Tamp Sensor
- Tamp/Blow
- Corner and Swing arm Tamps
- Label roll outside diam. 400mm